


Functions Added in TD-30 Version 1.10

This page explains the functions that have been added in TD-30 version 1.10. Please read this along with the TD-30 owner's manual.

Support for USB Audio

If you use a commercially available USB cable to connect the TD-30's USB COMPUTER port to a USB port of your computer, sound played back by your computer can be heard through the TD-30, and sounds played by the TD-30 can be recorded on your computer.

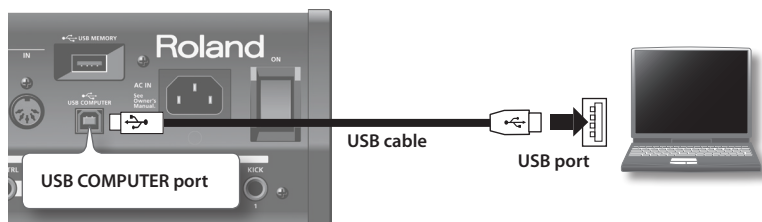


- * USB COMPUTER port outputs the same audio signal as is output from the MASTER OUT jacks.
- * The sounds played by your computer will be output from only the TD-30's MASTER OUT jacks and PHONES jack.
- * In order to use USB, you must first install the USB driver. For details on the USB driver, refer to "Installing the USB Driver" in the TD-30 owner's manual.
- * A USB cable is not included. To purchase one, please contact the dealer where you purchased the TD-30.

Adjusting the Digital Audio Input/Output Volume (GAIN)

In addition to adjusting the volume of the output from the DIGITAL OUT jack, you can now also adjust the volume of the input/output for the USB COMPUTER port (USB audio).

1. Press the [SETUP] button.
2. Press [F5] (A►B►C) button to access the SETUP B screen.
3. Press the [F2] (GAIN) button.

The DIGITAL IN/OUT GAIN screen will appear.

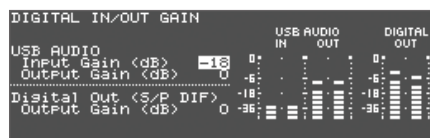

4. Use the [-] [+] buttons, the dial, or the cursor [▲] [▼] buttons to edit the parameters.

Parameter	Value	Explanation
USB AUDIO Input Gain	-36—0+12 dB	Adjusts the volume of the input to the USB COMPUTER port (default setting: -18 dB).
USB AUDIO Output Gain	-24—0+24 dB	Adjusts the volume of the output from the USB COMPUTER port.
Digital Out Output Gain	-24—0+24 dB	Adjusts the volume of the output from the DIGITAL OUT jack.

5. Press the [EXIT] button to return to the SETUP B screen.

Copyright © 2012 ROLAND CORPORATION

All rights reserved. No part of this publication may be reproduced in any form without the written permission of ROLAND CORPORATION.